Automobiles and curb along rue de Terrebonne

Registered vehicles known by postal district, modelled below it; legal curb measured block face by block face

Rick Hoge, PhD November 12, 2026 version 2026-11-12-20-21-04

Preliminary results, not peer reviewed (version November 12, 2026).

Lay summary

How many cars belong to the households along the Terrebonne bike lane, and how much curb is there to park them? Québec's vehicle registry, as released, places each vehicle only in a postal district of about 10,000 households (H4A or H4B), not on a street. This note looks closer, and says which parts are measured and which estimated.

Measured: the curb. Using the City's inventory of parking signs, every side of every block was read for stretches where parking is always forbidden. The 22 census areas that touch the lane, reaching about one block to each side, hold 37 km of legal curb. That is an upper limit: driveways and hydrants are not removed.

Estimated: the cars. Census facts about each small area (renters, commuters who drive, household size, income) were used to share out each district's registered automobiles. For the corridor's 5,471 households the estimate is about 4,600 automobiles, between 4,400 and 4,900: 0.84 per household. For a single small area the estimate is uncertain by about a quarter either way.

Tested where the answer is known (sharing a group of districts' total among its members), the method was off by 5 per cent at the median, against 14 per cent for a split by number of households.

At 5.5 m per car, the corridor's legal curb would hold about 6,800 cars: more than the estimated number registered there, even if all were kept on the street. Every lot was examined on aerial photos and a random sample of 112 checked from the street: 85 of 99 small buildings have a driveway, pad or garage. That makes about 2,200 private places, garage interiors and apartment buildings not counted. Neither figure measures parking difficulty: visitors, time limits and distance to one's door are left out.

The note makes no recommendation.

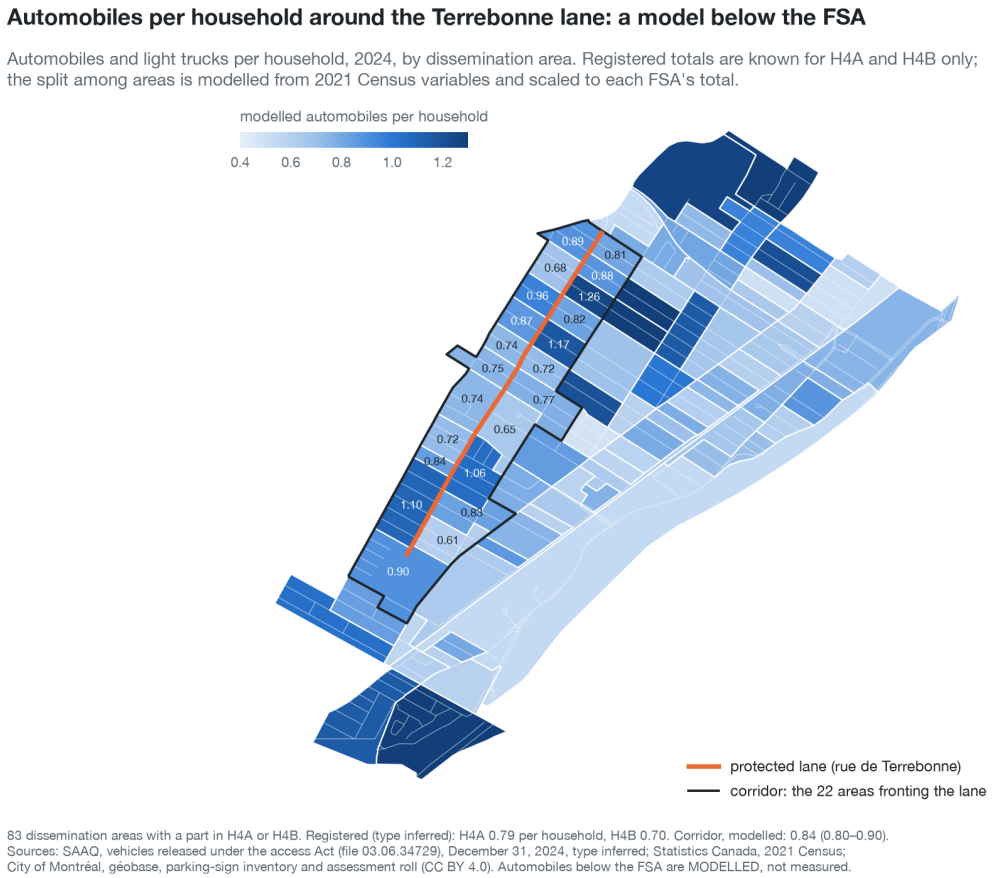


Figure 1: Overview. Modelled automobiles and light trucks per household by dissemination area, 2024. The registered totals are known for the two FSAs only; the split among areas is a model.

Contents

1 Question **4**

2 Data **4**

3 Method **4**

3.1 Dissemination areas and FSAs 4

3.2 The corridor 5

3.3 Legal curb 5

3.4 Automobiles below the FSA 5

4 Results **6**

4.1 Does the model work where the answer is known? 6

4.2 The corridor 7

4.3 Legal curb 8

4.4 Automobiles beside curb: if every vehicle were kept on the street 8

4.5 Private parking 9

4.6 The corridor on one map 12
4.7 Snow-loading nights 13
4.8 A check from the 2015 LiDAR night 16

5 What the note shows and does not show **17**

6 Reproducibility **17**

A Tables **18**

1 Question

The vehicle files the SAAQ released under the access Act for 2023 and 2024 (file 03.06.34729) locate each vehicle to its forward sortation area (FSA, the first three characters of the postal code), and no finer. The protected bike lane on rue de Terrebonne lies in two FSAs: H4B west of avenue Royal, H4A east of it. On December 31, 2024 they held 7,351 and 9,598 automobiles and light trucks (type inferred from make, model and model year, as in the note of the repository *Quebec-vehicle-registrations*), that is 0.70 and 0.79 per household of the 2021 Census.

An FSA holds ten to twelve thousand households; the lane's surroundings are a fraction of each. This note asks what can be said at a finer grain, about the dissemination areas that front the lane: how many automobiles are registered there, and how much legal curb they hold. The two halves of the answer are of different kinds, and the note keeps them apart throughout:

- **Curb is measured**, block face by block face, from the City's géobase and its inventory of parking signs.
- **Automobiles below the FSA are modelled**, from 2021 Census variables, and scaled so that the areas of each FSA sum to its registered total. Within an FSA the split is an estimate with an interval, never a count.

The 2015 LiDAR and the aerial imagery read for the 1954–55 plans work serve as a check, not as an input. The note makes no recommendation.

2 Data

- **Vehicles.** SAAQ, files released under the access Act for December 31, 2023 and 2024, by FSA; the table `type_by_fsa.csv` of *Quebec-vehicle-registrations* (type inferred; all automobiles and light trucks, whether registered to a person or to a business: the release carries no class).
- **Census.** Statistics Canada, 2021 Census profile by FSA (98-401-X2021013) and by dissemination area (98-401-X2021006), and the dissemination-area boundaries. Counts are randomly rounded to 5 by Statistics Canada; tenure, commuting and income come from the 25 % sample.
- **Curb.** City of Montréal, géobase (street segments, October 14, 2026) and *Signalisation – stationnement* (sign inventory, October 23, 2026), both CC BY 4.0.
- **Dwellings.** City of Montréal, *Unités d'évaluation foncière* (assessment roll, CC BY 4.0), used to share a dissemination area that straddles two FSAs and to count the dwellings addressed on rue de Terrebonne; FSA polygons from DMTI Spatial, CanMap Postal Code Suite v2024.3 (under licence, not redistributed).
- **Checks.** The cars counted by eye on the City's 2015 night LiDAR and the garage and driveway readings, from the folder *1954-underwriters-plans-terrebonne-garages*; the parking counts of the borough's 2023 study (EXP), as transcribed in *2026-parking-supply-demand-survey-context*.

3 Method

3.1 Dissemination areas and FSAs

Dissemination areas do not nest in FSAs. Each area is shared among FSAs in proportion to the dwellings of the assessment roll found in each FSA polygon. Rebuilt this way from dissemination areas,

the households of the island's 96 FSAs of 1,000 households or more differ from Statistics Canada's own FSA profile by 0.5 % at the median (H4A −1.2 %, H4B −1.2 %). 83 areas have a part in H4A or H4B.

3.2 The corridor

The corridor is the set of 22 dissemination areas that hold a block face of rue de Terrebonne along the lane, from its west end to Girouard. They reach about one block to each side (Somerled is about 260 m north of the lane, Monkland about 285 m south); 17 of them have nine-tenths or more of their surface within 300 m of the lane (the others are the larger areas toward the west end, the smallest share being 19 %), and no area outside the set has half its surface within that distance.

3.3 Legal curb

A block face is one side of one géobase segment (autoroutes, bridges, tunnels and back lanes left out). A segment runs from the centre of one intersection to the centre of the next. A face's legal curb is its length, less 10 m at each end, less the stretches where a sign forbids stopping or parking at all times (« \A EN TOUT TEMPS », « \P EN TOUT TEMPS »). The stretch a sign governs runs from its pole to the next pole in the direction of its arrow; a sign without an arrow governs the stretches on both sides of its pole. Where the usual reading of the arrows leaves a stretch claimed both by an all-time prohibition and by another parking rule (hours, days, a time limit: a rule that implies parking exists there), the other reading is taken for that face if it leaves fewer such stretches; a stretch still claimed both ways counts for half.

The 10 m at each end is the half roadway of the cross street (5 m, an assumption: the local cross streets measure 9.0 to 9.4 m from curb to curb on the 2015 LiDAR, rue de Terrebonne 11.0 m) plus the 5 m next to an intersection where the Highway Safety Code forbids stopping, signed or not (art. 386, par. 4).

The result is an **upper bound** on legal curb: driveways, hydrants, bus stops, hourly rules, permit zones and seasonal rules are not deducted. Places are legal curb divided by 5, 5.5 and 6 m.

Check on rue de Terrebonne, where the layout is known: the reading finds parking on the south side west of Cavendish and on the north side east of it, one band, as built in 2024: 1,306 m of legal curb, 238 places at 5.5 m. The borough's 2023 study counted 478 places on the two sides before the lane (report p. 40): 230 westbound and 248 eastbound.

3.4 Automobiles below the FSA

1. Across the 114 FSAs beginning with H that hold 1,000 households or more, the logarithm of automobiles per household is regressed on four census variables: the share of renter households, the share of commuters who drive, persons per household, and the logarithm of the median household income. The regression is robust (Huber weights), because a few FSAs hold fleets registered to businesses (H2Y, H2Z, H3A, H3B, H4P, H9P: registered counts more than 1.5 times what their census variables predict).
2. The rate of each dissemination area is predicted from its own census variables.
3. The predictions are scaled so that the parts of the areas lying in each FSA sum to that FSA's registered total. The scale factors of H4A and H4B are 1.07 and 0.99.

Specifications were compared by leaving each FSA out in turn (Table 4); the one used has the smallest error at the 90th percentile and close to the smallest at the median. Dwelling type adds nothing once tenure, commuting and household size are in.

Intervals come from 2,000 draws, each combining: the FSAs resampled and the model refitted; the sampling error of the 25 % sample variables in each dissemination area; an unexplained factor for each area, whose spread is the one measured by the downscaling test below; and the scaling to the FSA totals. Dissemination areas are about twenty times smaller than FSAs, and their true unexplained spread may be larger than the one measured among FSAs: the tables also carry intervals with that spread doubled, which are wider by a few points only, because the sampling error of the census variables dominates. The intervals do not cover what the model cannot see: the vehicles are those of December 31, 2024 and the census is of May 2021; the type is inferred; vehicles registered to businesses are in the totals.

4 Results

4.1 Does the model work where the answer is known?


Two tests, both at the level of FSAs, the only level at which registered counts exist.

Each FSA left out in turn. The model fitted on the other FSAs predicts the left-out FSA's rate within 5.4 % at the median (24 % at the 90th percentile, the business FSAs included). H4A is under-predicted by 11 %, H4B by 0.6 %.

Downscaling, one level up. Neighbouring FSAs were grouped by threes (27 groups, 103 FSAs); for each group the model was fitted without its members, and the group's registered total was shared among them by the model. This is the operation the note performs below the FSA, done where it can be checked. The share of each FSA is off by 4.6 % at the median (26 % at the 90th percentile); sharing in proportion to households is off by 13.9 % (42 %). Without the groups that hold a business FSA: 3.9 % against 12.3 %. For H4A and H4B taken as one group, the model's shares are off by −4.6 % and +6.0 %, the household split by −5.5 % and +7.1 %: for this pair the model gains little.

Testing the model where the answer is known: FSAs

Left: each FSA's rate predicted by a model fitted without it. Right: a group of neighbouring FSAs' registered total shared among its members, by the model and in proportion to households; error of each member's share.

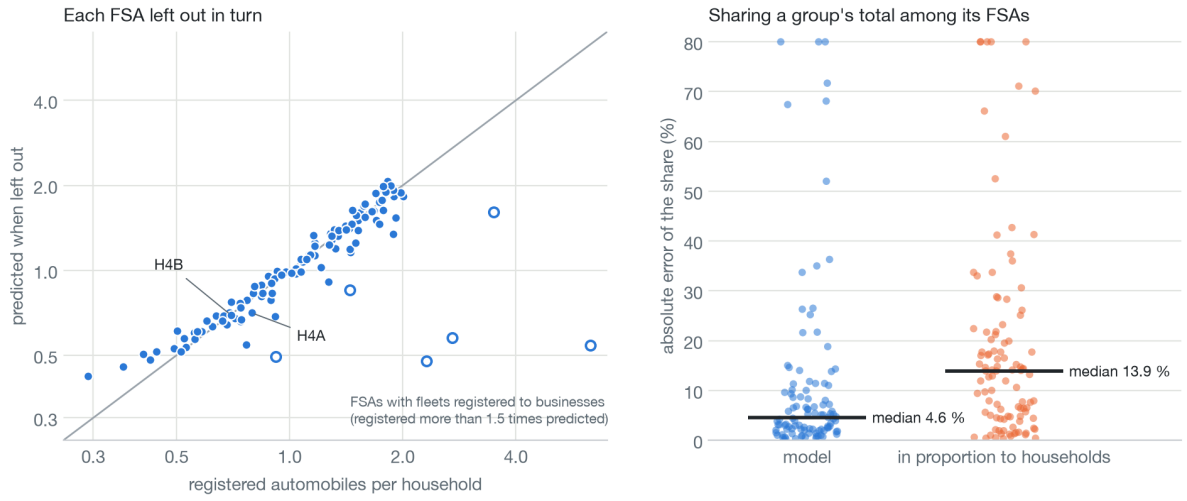

Sources: SAAQ, vehicles released under the access Act (file 03.06.34729), December 31, 2024, type inferred; Statistics Canada, 2021 Census; City of Montréal, géobase, parking-sign inventory and assessment roll (CC BY 4.0). Automobiles below the FSA are MODELLED, not measured.

Figure 2: The two tests. Left: each FSA's rate predicted without it (hollow: FSAs with fleets). Right: error of each FSA's share of its group's total; errors above 80 % drawn at 80.

The tests say the model shares a total among FSAs better than households alone do. They cannot say how well it shares an FSA among its dissemination areas: no registered count exists at that level.

4.2 The corridor

Table 1: Modelled automobiles and measured legal curb. Interval: 90 %. Places: legal curb at 6 m to 5 m per vehicle (upper bound). Last column: modelled automobiles per place at 5.5 m.

	areas	hh.	autos	interval	per hh.	curb km	places	per place
Corridor	22	5,471	4,622	4,382–4,927	0.84	37.2	6,192–7,431	0.68
Other areas of H4A, H4B	61	18,978	14,363	14,033–14,641	0.76	109.3	18,210–21,852	0.72
All	83	24,449	18,985	18,830–19,163	0.78	146.4	24,402–29,283	0.71

The corridor's 5,471 households are estimated to have 4,622 automobiles and light trucks registered (4,382 to 4,927), 0.84 per household (0.80 to 0.90); the other areas of the two FSAs, 0.76. The two alternative specifications give 4,616 and 4,683 for the corridor. Area by area the estimates run from 0.61 to 1.26 per household, and the 90 % interval of a single area is about 29 % of its estimate either way (Figure 3, Table 6). The differences between neighbouring areas are mostly within those intervals.

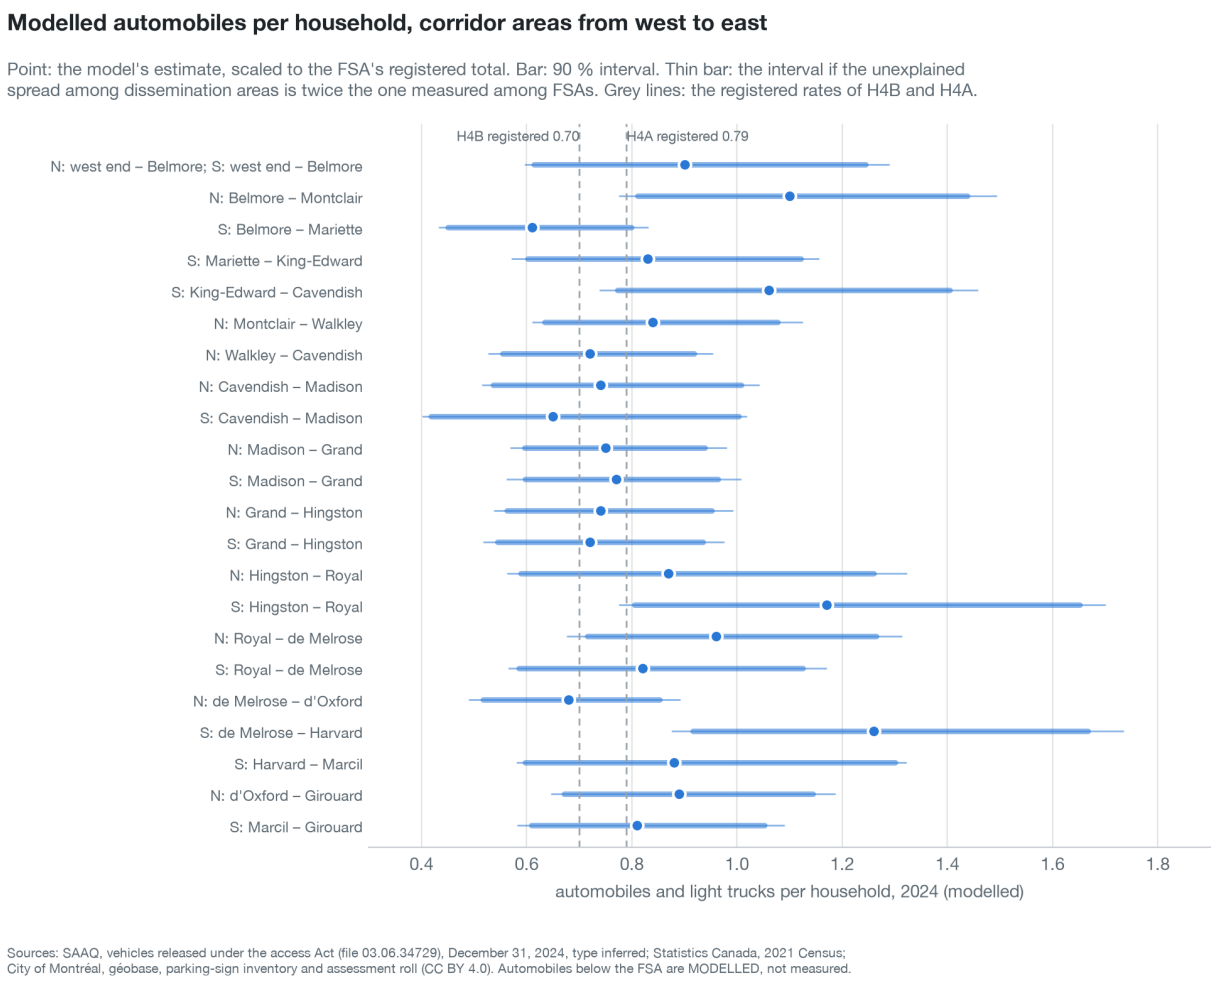


Figure 3: Modelled automobiles per household, the corridor's areas from west to east.

4.3 Legal curb

The corridor holds 46.8 km of curb; net of 10 m at each end of each face, 8 % is forbidden at all times, leaving 37.2 km of legal curb: 6,192 to 7,431 places at 6 to 5 m, an upper bound. That is 6.8 m of legal curb per household (5.8 m in the other areas of the two FSAs).

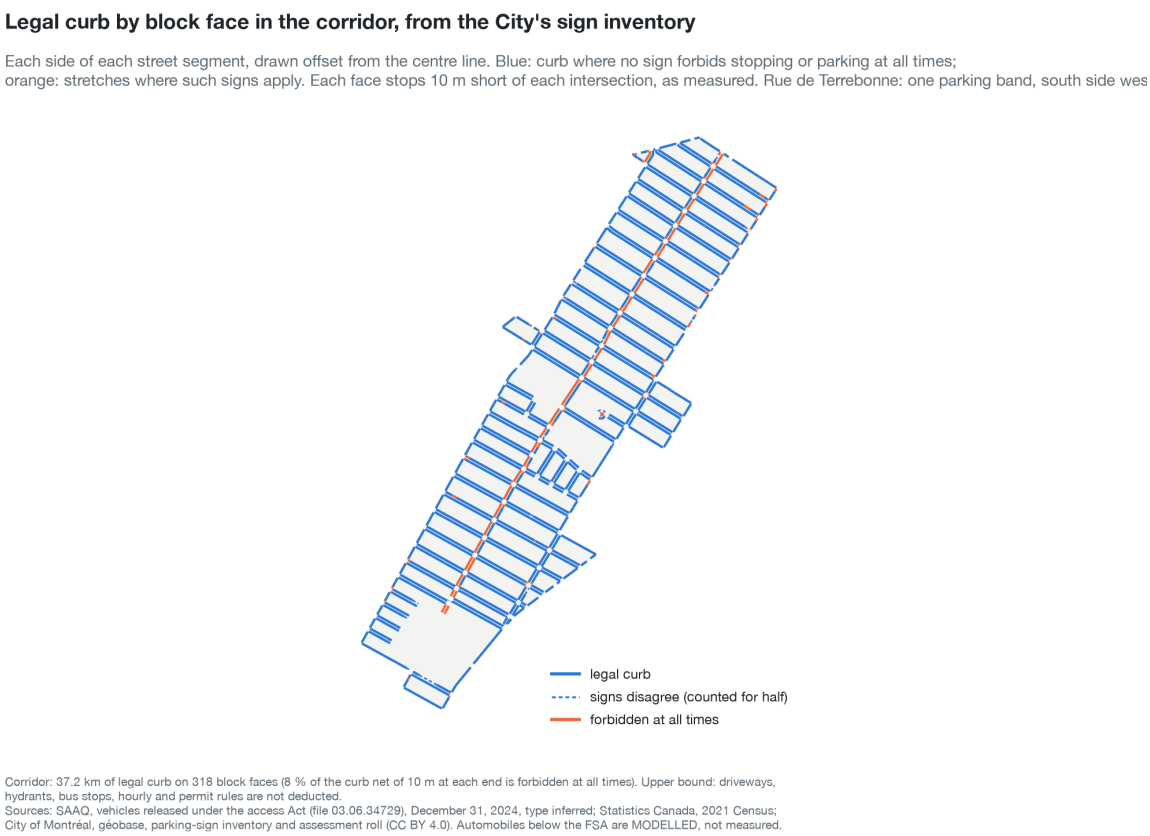


Figure 4: Block faces of the corridor. A face is drawn orange when all-time prohibitions cover half of it or more.

4.4 Automobiles beside curb: if every vehicle were kept on the street

At 5.5 m per place the corridor has 0.68 modelled automobile per place of legal curb (0.65 to 0.73); in 6 of the 22 areas the estimate exceeds the area's own places (Figure 5).

This comparison is the limiting case in which every registered vehicle is kept at the curb and no private place is used. Private parking is taken up in the next section.

The ratio is not a measure of parking pressure, in either direction. The curb figure is an upper bound (no driveway, hydrant or bus stop deducted, no hourly or permit rule). The automobile figure is every vehicle registered, wherever it is kept. Visitors, institutions and vehicles from elsewhere use the same curb; a place at the far end of an area is not a place at one's door. The measurements of occupancy that exist are those of the borough's 2023 study: on Thursday, September 29, 2022, at 18:30–19:30, 247 cars on rue de Terrebonne's places (50 %) and 311 on the cross-street stubs (51 %) (EXP, Tables 3-2 and 3-3, as transcribed in *2026-parking-supply-demand-survey-context*).

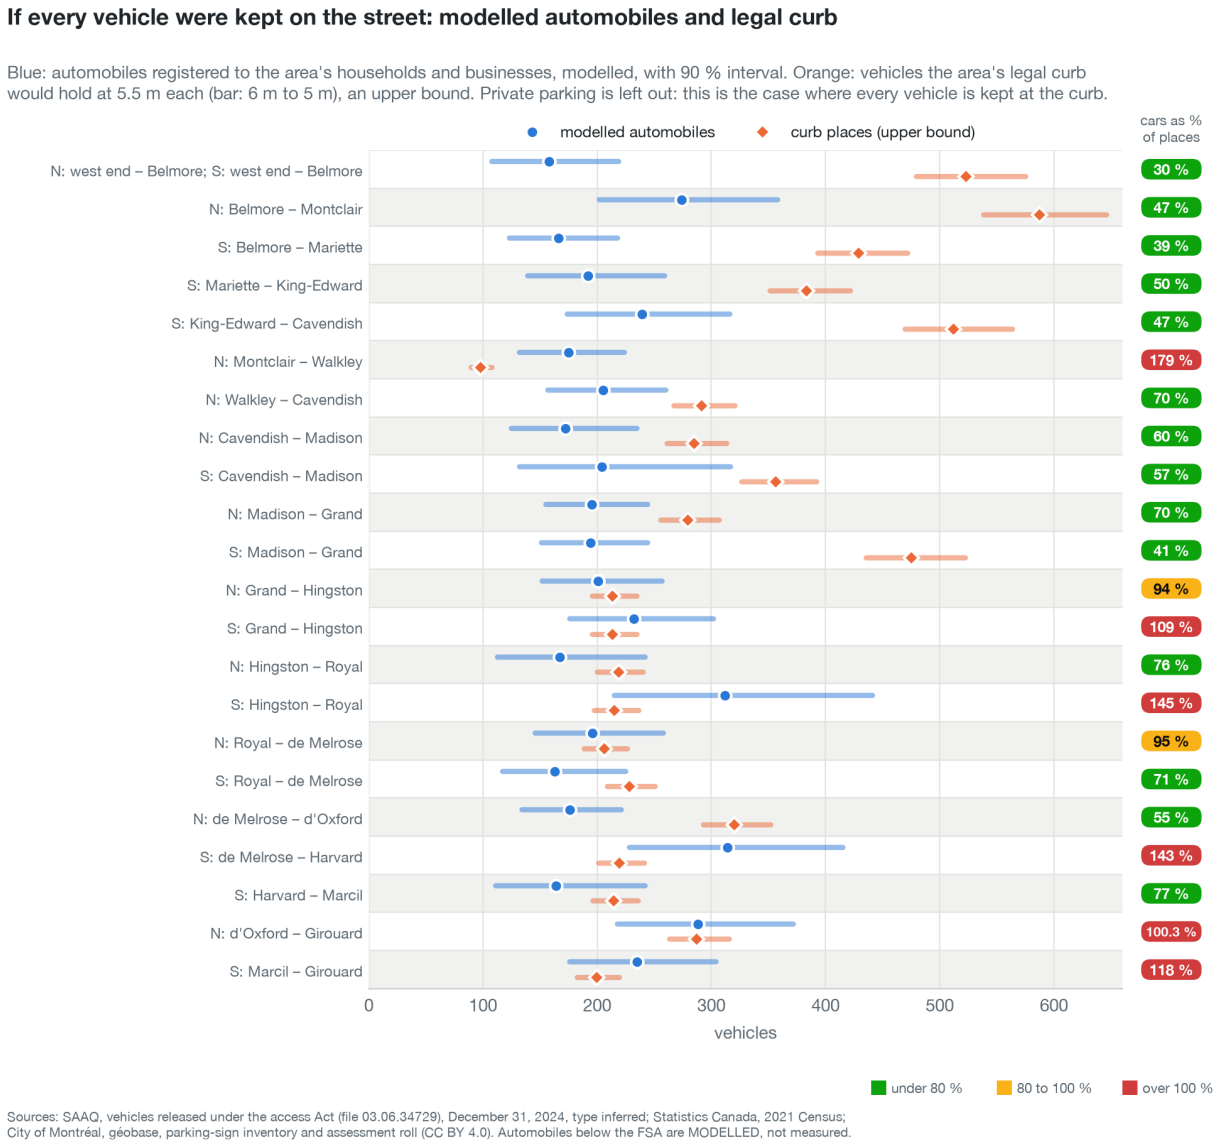


Figure 5: Modelled automobiles and the places the legal curb would hold, by area.

4.5 Private parking

Measured, on rue de Terrebonne. Every lot addressed on the street along the lane (154) was judged by the author from street-level imagery on November 12, 2026 (folder *1954-underwriters-plans-terrebonne-garages*, `derived/street_check/`): 129 of the 149 lots judged have car access today, at least one private place usable (87 %; 95 % interval 80 to 91). Its buildings of five dwellings or fewer hold 165 independent private places (266 counting cars in tandem) for 230 dwellings, whose modelled automobiles number 206; the street's one parking band holds 238 places at 5.5 m. On 31 lots the parking has been turned to another use, wholly (12) or in part (19), where the 1954–55 plans take precedence when they show a garage. The 6 larger buildings (246 dwellings) are given no places; 5 of them have an underground garage. Garage interiors are not counted. The check replaced a reading of October 25, 2026 from the 1954–55 plans and the aerial imagery (a garage as built or a driveway at 89 of 123 buildings, one place counted for each), which missed driveways.

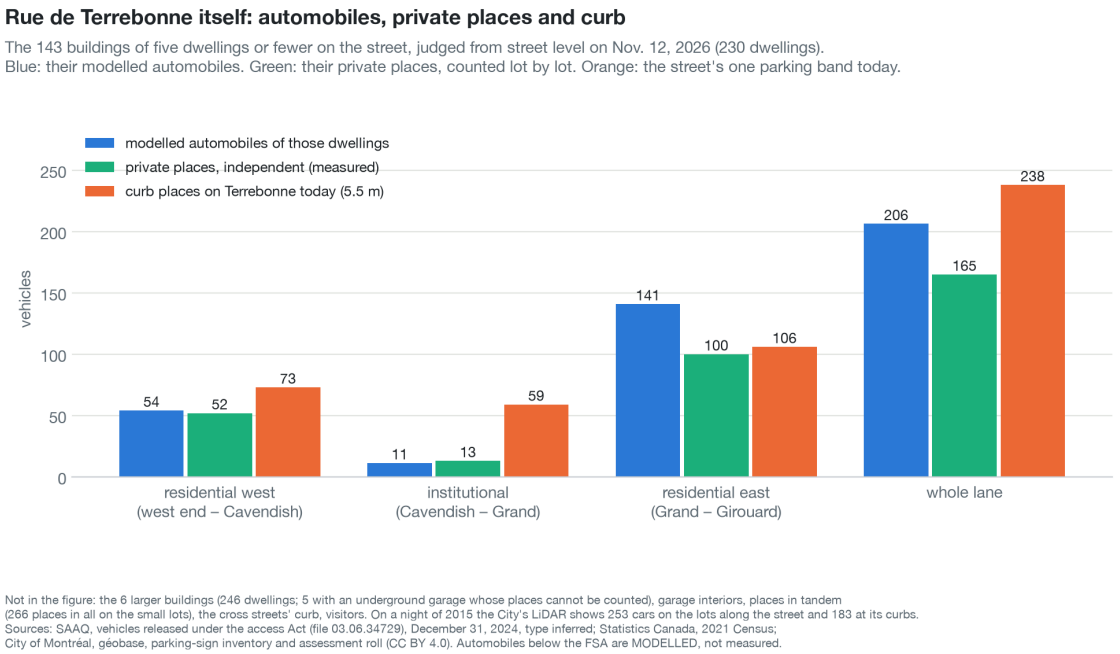


Figure 6: Rue de Terrebonne: modelled automobiles of the dwellings in its buildings of five dwellings or fewer, their private places counted lot by lot from street level (independent places), and the places of the street's parking band today, by sector of the 2023 study.

Measured, for the corridor. Every lot of the corridor that holds a dwelling (2,358 lots) was read on enlarged crops of the same aerial imagery, by independent readers working from a written protocol (folder `derived/readings/`): can a car be driven off the street and left standing clear of the sidewalk, on the lot's own driveway, a driveway shared with the neighbour, a front pad, a rear pad or a parking lot? A first reading failed its checks and was discarded; the protocol and the images were corrected and every lot was read again. Two independent readings of the same lot then agreed on 95 % of the lots where both gave a yes or a no.

Agreement between readers is not accuracy. Before the second reading, 112 lots were drawn at random (100 buildings of five dwellings or fewer, 12 larger), and the author judged each one from street-level imagery, without seeing any reader's answer. Of the 99 small buildings judged yes or no, 85 have car access (86 %; 95 % interval 78 to 91). The readers from above missed part of them:

Table 2: The author's check against the readers' answers, buildings of five dwellings or fewer. Places: as counted by the author; independent = a car can leave without another being moved; garage interiors not counted.

Reader's answer	lots checked	with car access	independent places	total places
Yes	56	52	59	97
Unclear	20	18	20	36
No	23	15	16	26

The estimate therefore rests on the check, and uses the readings only to sharpen it: to the lots of each reader answer (1,428 yes, 470 unclear, 364 no) it applies the share with access and the mean number of places the author found for the checked lots of that answer. Intervals come from resampling the checked lots (2,000 draws, 90 %).

For the corridor's 2,262 buildings of five dwellings or fewer: 1,986 have car access (1,867 to 2,096; 88 %), with 2,228 independent places (2,051 to 2,414) and 3,731 places in all when cars standing one behind another are counted (3,415 to 4,053). Garage interiors are in neither figure. Curb and independent private places together number 8,983 at 5.5 m, against 4,622 modelled automobiles: 0.51

automobile per place, against 0.68 with the curb alone; the estimate exceeds the area's places in 2 of the 22 areas, against 6.

Buildings of six dwellings or more (96 buildings, 2,592 dwellings) are given no private place here. Of the 12 in the check, 6 have an underground garage whose places cannot be seen from the street or from above, 4 have no parking, and for 2 it could not be told. Their modelled automobiles are in the comparison; their garages are not.

Limits. The check is one person's judgment from street-level imagery, on 99 small buildings. The aerial imagery predates the 2024 lane; the street-level imagery is more recent. The first reading of rue de Terrebonne, of October 25, was made from the air alone and found a garage or driveway at 72 % of the buildings; checked from the street, the same street gives 87 % with car access, close to the 86 % found for the corridor's sample from the street.

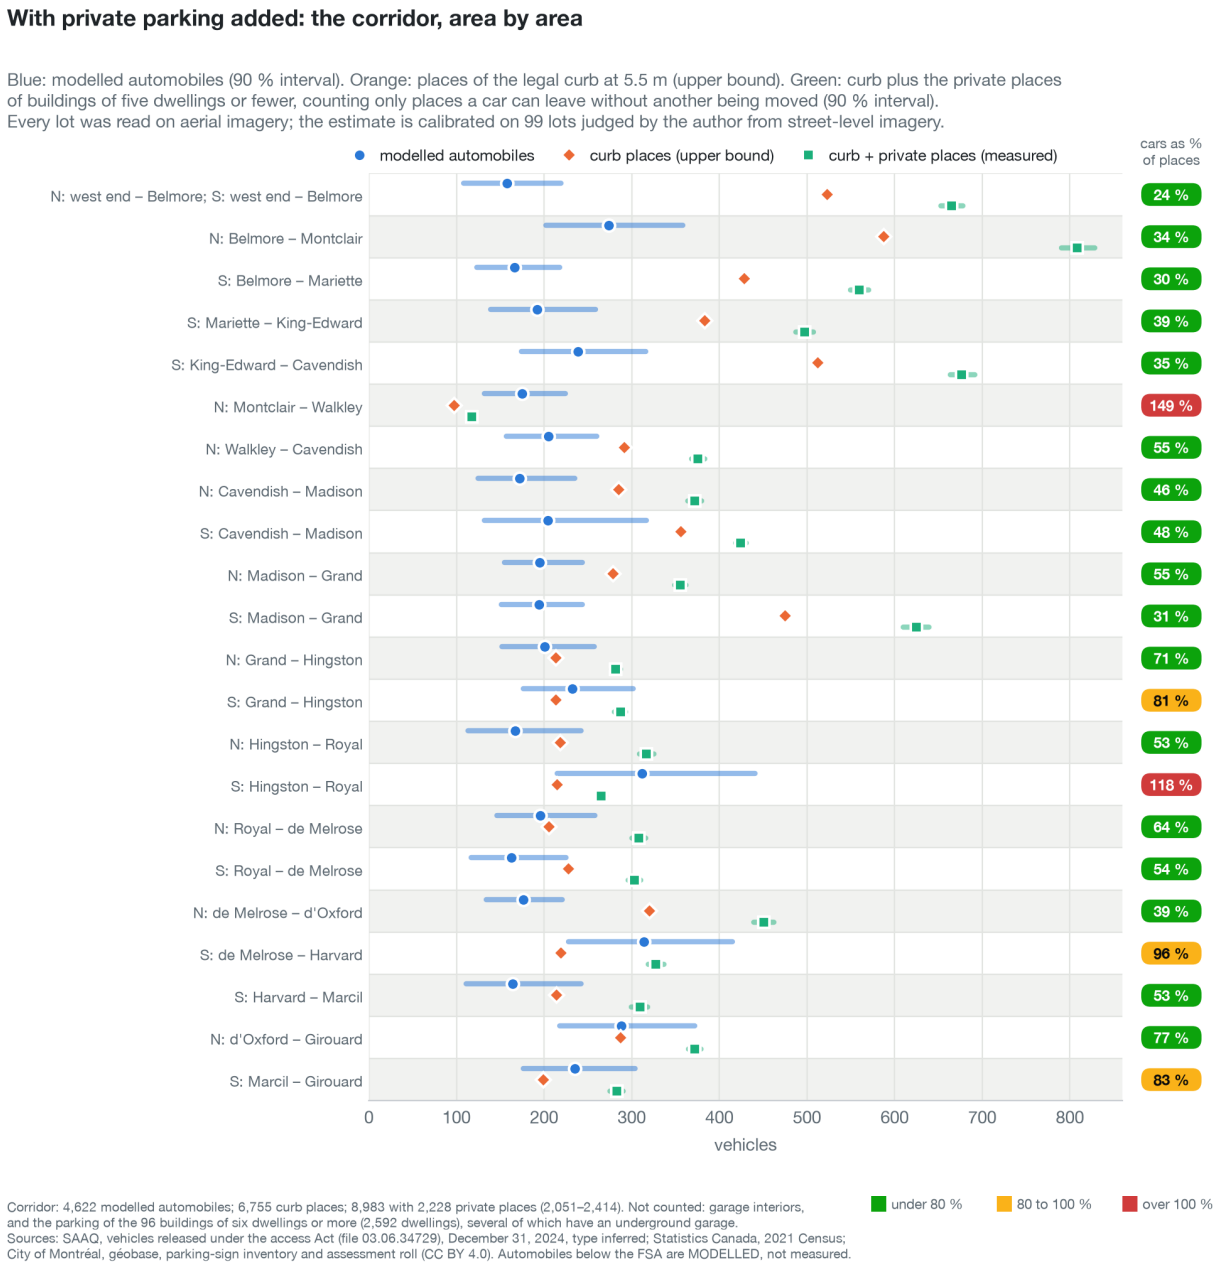



Figure 7: The corridor's areas with the measured private places of small buildings added (independent places only).

4.6 The corridor on one map

Figure 8 puts every source on one map: each area shaded by its modelled automobiles, the legal curb of every block face, and, on rue de Terrebonne, each lot's private places as counted from the street. Elsewhere in the corridor no private place is drawn lot by lot, since per lot those are readings from above; the table below the map gives each area's calibrated total with its interval. Figure 9 colours each area by its modelled automobiles as a share of its places, with the thresholds of the charts (green under 80 %, yellow 80 to 100 %, red over 100 %): with private places, 17 green, 3 yellow, 2 red; with the curb alone, 14 green, 2 yellow, 6 red. With private places, the areas over 100 % are areas where almost every household lives in a building of six dwellings or more, whose garages are not counted (share of households in such buildings: area 6, 95 %; area 15, 93 %): the share there reflects places the count leaves out. A share compares registered vehicles with capacity; it does not measure how full the street is.

Parking in the Terrebonne corridor: modelled automobiles, measured curb, measured private places

Fill: automobiles registered to each area's households, MODELLED from the SAAQ file of 2024. Orange: legal curb by block face (measured, upper bound).
Green on rue de Terrebonne: each lot's private places, counted from street level on Nov. 12, 2026. Table: the same three, and private places, per area.

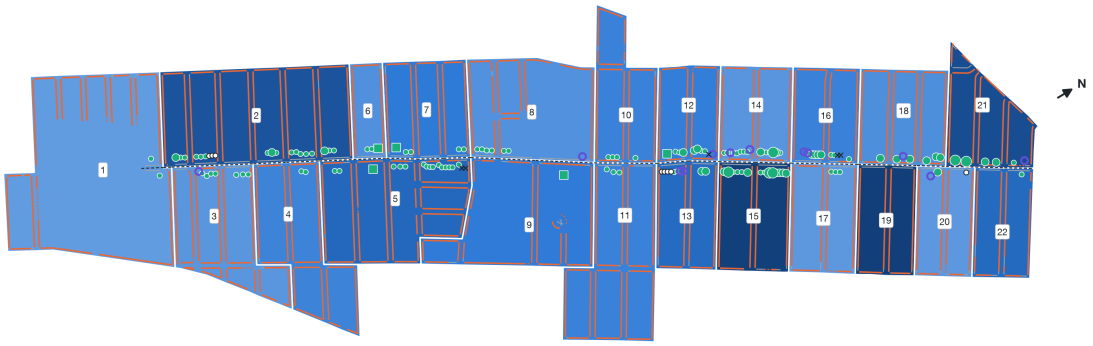

area	automobiles (modelled, 90 %)	curb places (5.5 m)	private places (small buildings, 90 %)
1	158 (108–219)	523	142 (130–155)
2	274 (202–358)	587	221 (203–241)
3	166 (123–218)	429	131 (121–142)
4	192 (139–259)	384	114 (104–124)
5	239 (174–316)	512	164 (151–179)
6	175 (132–224)	98	20 (18–21)
7	205 (157–260)	292	84 (77–92)
8	172 (125–235)	285	87 (79–95)
9	204 (132–317)	356	68 (62–74)
10	195 (155–244)	279	76 (70–83)
11	194 (151–244)	475	150 (135–164)

area	automobiles (modelled, 90 %)	curb places (5.5 m)	private places (small buildings, 90 %)
12	201 (152–257)	213	68 (63–74)
13	232 (176–302)	213	74 (67–80)
14	167 (113–242)	219	98 (90–107)
15	312 (215–441)	215	50 (46–55)
16	196 (146–258)	206	102 (94–110)
17	163 (117–225)	228	75 (68–82)
18	176 (134–221)	320	131 (119–142)
19	314 (228–415)	220	108 (99–117)
20	164 (111–242)	214	95 (85–104)
21	288 (218–372)	287	85 (78–92)
22	235 (176–304)	199	84 (76–91)
corridor	**4,622 (4,382–4,927)**	**6,755**	**2,228 (2,051–2,414)**

Curb: géobase faces less 10 m at each end and stretches forbidden at all times; driveways, hydrants, bus stops, hourly and permit rules not deducted. Private places: cars that can leave without another being moved; garage interiors and the 96 larger buildings' garages not counted; off Terrebonne, the reading of every lot calibrated on 99 lots checked from the street.
Places are capacity, not use: the table does not measure how full the street is.
Sources: SAAQ, vehicles released under the access Act (file 03.06.34729), December 31, 2024, type inferred; Statistics Canada, 2021 Census;
City of Montréal, géobase, parking-sign inventory and assessment roll (CC BY 4.0). Automobiles below the FSA are MODELLED, not measured.

Figure 8: The corridor's parking on one map: areas shaded by modelled automobiles (SAAQ 2024), legal curb by block face (measured), and rue de Terrebonne's lots by their private places (counted from street level, November 12, 2026); per area, modelled automobiles, curb places and private places with their intervals.

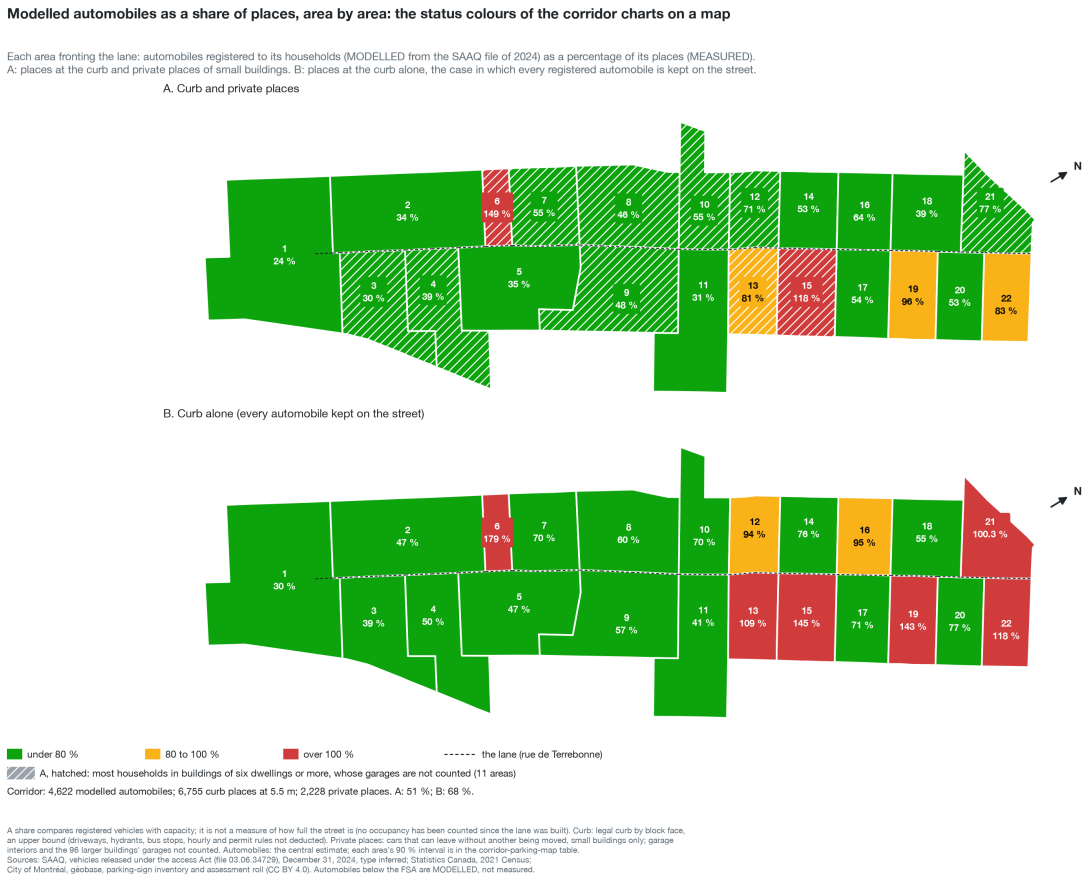


Figure 9: Modelled automobiles as a share of places, by area. A: curb and private places; B: curb alone. Hatched in A: areas where most households live in buildings of six dwellings or more, whose garages are not counted.

4.7 Snow-loading nights

On a snow-loading night parking is banned on the streets being cleared. The City publishes the truckloads hauled per snow-removal sector and per day, and each season's sector outlines; it does not publish which street, or which side, was under a ban on which night. Info-Neige (Planif-Neige) is offered as a live service with a token, with no history on the open-data portal (checked November 12, 2026). That part is therefore replaced by assumptions, stated here and given a range. The figures below compare capacity on a loading night; none is an observation of a loading night.

Operations. The corridor's legal curb lies in three sectors in 2025–26: CDN-301 (28.7 km), CDN-111 (8.1 km) and CDN-112 (0.4 km); in 2021–22 it lay in the sectors of that season (CDN-301, CDN-105, CDN-106). A loading operation is taken to be a run of loading days in a sector, one-day gaps allowed, of at least 100 truckloads, between December 1 and March 31; 68 smaller runs in the borough's sectors are treated as spot removals and left out. CDN-301 had 4, 4, 2, 2 and 5 operations in the five winters 2021–22 to 2025–26. Each block face is assumed to be under a ban for one night per operation, during the night hours, when registered automobiles are at home.


Two scales. *Area*: displaced cars stay in their own area. On the area's loading nights a share of its curb is under a ban: 25 % (its streets spread over four nights, a side at a time), 50 % (a side a night, two nights: the central case) or 100 % (both sides the same night). *District*: displaced cars can park anywhere in the district's part of the corridor; on each night the share of its curb under a ban is that night's truckloads in the sector over the operation's total, as if loading proceeded evenly over the sector. That share never exceeds 36 %.

Free lots. The City's list of lots open during loading holds one lot within 1.5 km of the corridor: the Doug-Harvey arena lot (4985 West Hill), 20 places, 18:00–07:00, listed for 2021–22, 2022–23, 2023–24 and not for the last two winters. Its places are added in the winters it was listed, to each area within 500 m and to the Loyola district.

Area scale. In the central case, on its loading night, 7 of the 22 areas have more modelled automobiles than places, private places included; 2 of them (areas 6 and 15, mostly of large buildings whose garages are not counted) are above 100 % on an ordinary night already. The other 5 (areas 12, 13, 19, 21, 22) are pushed above 100 % on 6.8 nights a winter on average (two nights an operation, five winters). With the curb alone, 17 areas are above 100 % on their loading night, 6 of them already on an ordinary night. If the ban takes 25 % of the curb a night, 3 areas are above 100 % with private places (1 pushed over by loading); if it takes 100 %, all 22 are (Figure 10).

District scale. The Loyola part of the corridor stays below 100 % on every night of the five winters, with the curb alone (at most 77 %) as with private places. The Notre-Dame-de-Grâce part stays below 100 % with private places (at most 92 %); with the curb alone it is above 100 % on 22, 22, 9, 9 and 28 nights in the five winters, of 29, 27, 12, 28 and 36 nights with loading in its sectors. At the upper end of the automobile interval, with private places, it is above 100 % on 18, 15, 8, 4 and 16 nights. With a threshold of 50 or 200 truckloads for an operation, the NDG count with the curb alone over the five winters is 91 or 83, against 90 (Figure 11).

What these figures cannot show. Which streets were under a ban on which night, and for which hours; whether loading proceeds evenly over a sector; where displaced cars actually went. A long run of loading days may hold two operations (February 2025: 22 days counted as one), which would add nights. Visitors, institutions and vehicles from elsewhere are not in the automobile figure; vehicles kept in garages are not in the places. As everywhere in this note, a share of places compares capacity, not occupancy; registered automobiles stand in for overnight demand.

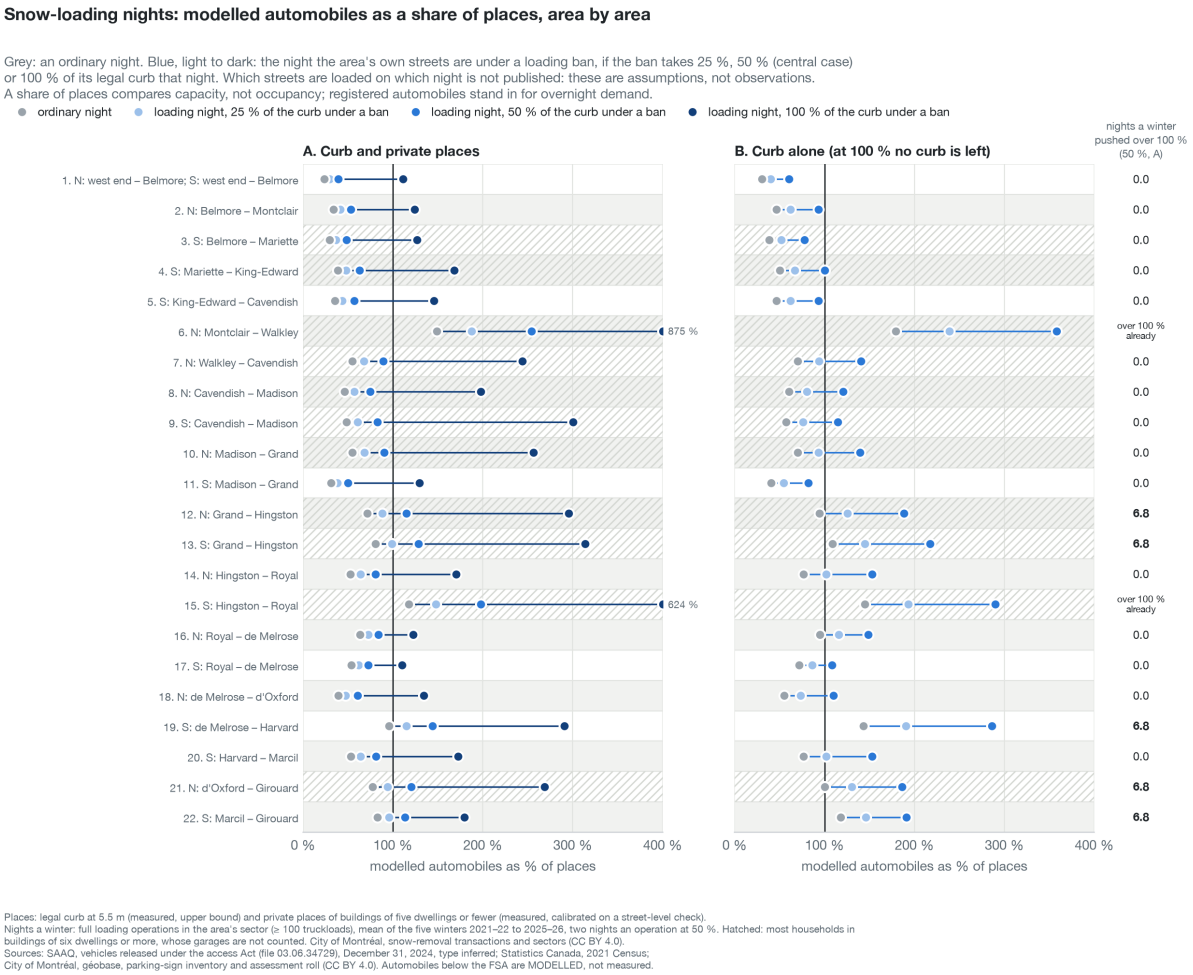

Places: legal curb at 5.5 m (measured, upper bound) and private places of buildings of five dwellings or fewer (measured, calibrated on a street-level check).
Nights a winter: full loading operations in the area's sector (≥ 100 truckloads), mean of the five winters 2021–22 to 2025–26, two nights an operation at 50 %. Hatched: most households in buildings of six dwellings or more, whose garages are not counted. City of Montréal, snow-removal transactions and sectors (CC BY 4.0).
Sources: SAAQ, vehicles released under the access Act (file 03.06.34729), December 31, 2024, type inferred; Statistics Canada, 2021 Census; City of Montréal, géobase, parking-sign inventory and assessment roll (CC BY 4.0). Automobiles below the FSA are MODELLED, not measured.

Figure 10: Snow-loading nights, area by area: the share of places on an ordinary night and on the area's loading night, under the three assumptions.

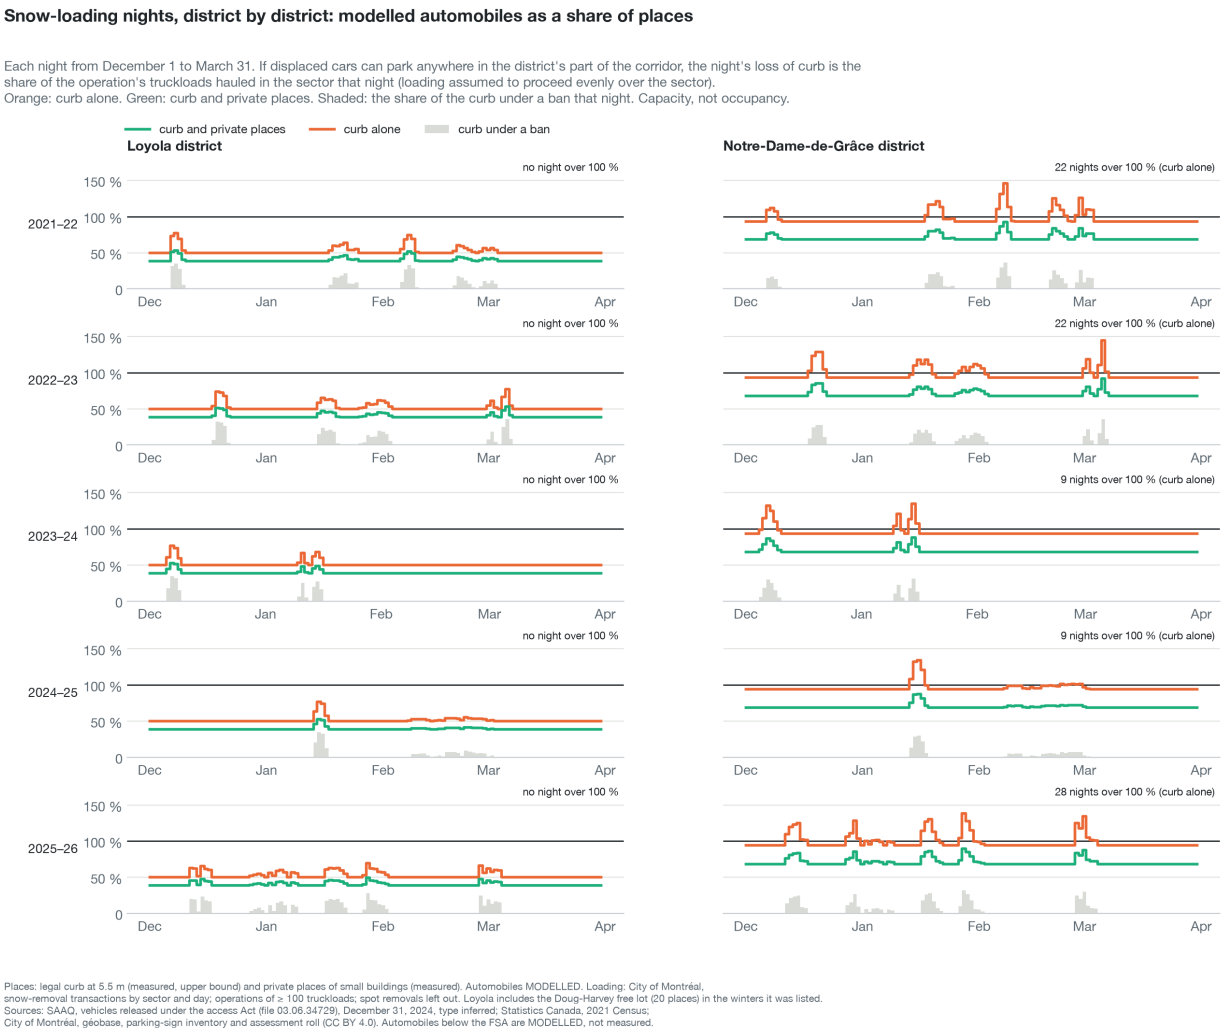


Figure 11: Snow-loading nights, district by district, five winters, night by night.

4.8 A check from the 2015 LiDAR night

The City's 2015 LiDAR was flown at night. Counted by eye along rue de Terrebonne: 183 cars at the curbs and 253 on the lots along the street, 436 for the 573 dwellings addressed on the street: 0.76 per dwelling. The model gives 0.84 per household for the areas that hold those dwellings.

Table 3: Cars seen on the 2015 LiDAR night along rue de Terrebonne, and the model, by sector of the 2023 study.

Sector	dwellings	at curbs	on lots	seen per dwelling	modelled per household
Residential west	146	52	97	1.02	0.93
Institutional	140	29	45	0.53	0.66
Residential east	287	102	111	0.74	0.89
Whole lane	573	183	253	0.76	0.84

The two quantities are not the same: the LiDAR sees visitors' cars and the lots of churches, schools and corner buildings addressed on the cross streets, and does not see cars inside garages or away for the night; nine years separate the two. They agree in order of magnitude. They do not agree in detail: across the 11 areas with ten dwellings or more on Terrebonne, the rank correlation between cars seen per dwelling and the modelled rate is 0.31 ($p = 0.36$), not distinguishable from none. The check therefore supports the level of the estimate, not the split between areas.

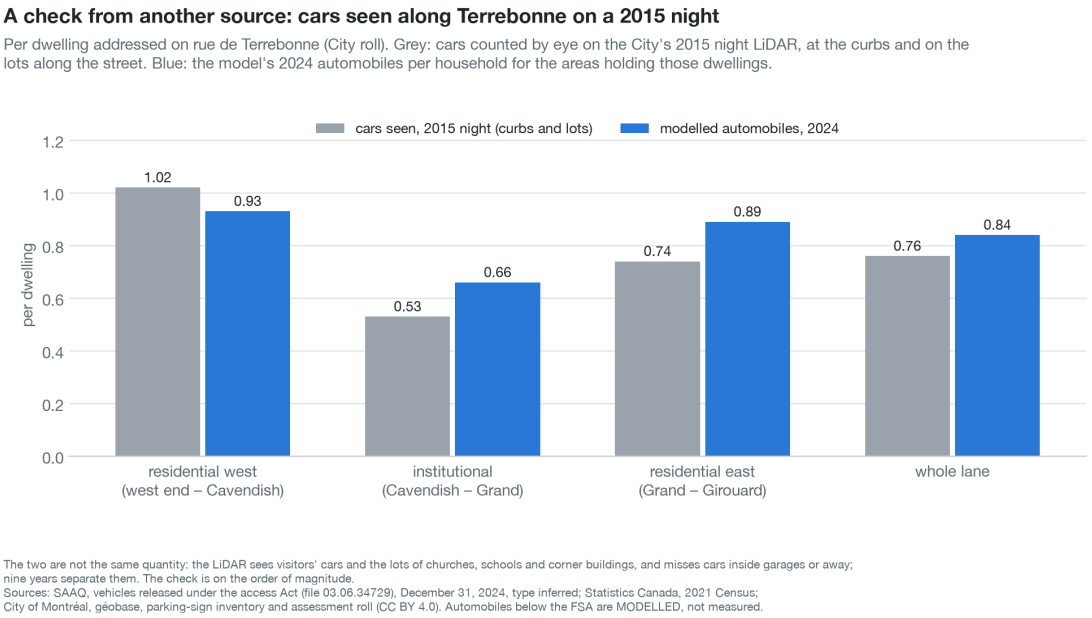


Figure 12: Cars seen per dwelling on the 2015 night and the model's rate, by sector.

5 What the note shows and does not show

- **Measured:** the registered automobiles of H4A and H4B (type inferred); the legal curb of each block face, as an upper bound; the dwellings and, on rue de Terrebonne, the garages and driveways.
- **Measured, with a measured error:** private places of the corridor's small buildings, from a reading of every lot calibrated on a random sample checked from the street.
- **Not counted:** garage interiors; the parking of buildings of six dwellings or more, several of which have underground garages.
- **Modelled:** the automobiles of every area smaller than an FSA. The model shares a known total better than households alone at the one level where this can be tested; below the FSA nothing can test it, and the 2015 check does not confirm its area-by-area differences.
- **Not measured by anyone:** where registered vehicles are kept; occupancy of the curb since the lane was built; which streets are under a snow-loading ban on which night (not published).
- The curb reading rests on the sign inventory as published on October 23, 2026 and on rules for arrows that were checked on rue de Terrebonne only.

6 Reproducibility

Scripts, tables and figures: `https://github.com/OpenMobilityData/Terrebonne-open-sources/tree/main/2026-terrebonne-corridor-vehicles-and-curb`. Order: `build_dataset.py`, `curb_supply.py`, `demand_model.py`, `corridor.py`, `offstreet_strips.py`, `offstreet_crops.py`, `offstreet_readings_v2.py`, `offstreet.py`, `snow_loading.py`, the figure scripts under `derived/figures/`, `build_docs.py`. The census, roll, sign and postal-code files are read from outside the repository (sources and dates in the folder's README); the tables by dissemination area and by block face are in `derived/tables/`.

A Tables

Table 4: Specifications compared, each FSA left out in turn: absolute error of the predicted rate (%), and the signed error for H4A and H4B.

Variables	median	75th	90th	H4A	H4B
households only	35.9	50.2	98.3	+40.0	+58.9
tenure, dwelling type	14.7	29.8	51.0	+29.9	+6.4
commuting	7.9	13.8	25.2	−15.3	+2.4
tenure, commuting, household size	5.5	10.9	25.8	−10.8	+0.2
tenure, commuting, household size, income (used)	5.4	11.0	24.4	−10.7	−0.6
tenure, commuting, household size, income, dwelling type	6.1	11.3	27.0	−9.9	−2.1

Table 5: Coefficients of the model used (logarithm of automobiles per household; robust regression, 114 FSAs).

Variable	coefficient	standard error
constant	−2.620	0.783
share of renter households	+0.015	0.114
share of commuters who drive	+2.013	0.114
persons per household	+0.198	0.047
log of median household income	+0.091	0.066

Table 6: The corridor's dissemination areas, west to east. N, S: side of rue de Terrebonne and the cross streets the frontage runs between. Automobiles: modelled, with 90 % interval. Places: legal curb at 5.5 m (upper bound).

Frontage on Terrebonne	FSA	hh.	autos	interval	per hh.	curb km	places
N: west end – Belmore; S: west end – Belmore	H4B	176	158	108–219	0.90	2.88	523
N: Belmore – Montclair	H4B	249	274	202–358	1.10	3.23	587
S: Belmore – Mariette	H4B	273	166	123–218	0.61	2.36	429
S: Mariette – King-Edward	H4B	231	192	139–259	0.83	2.11	384
S: King-Edward – Cavendish	H4B	225	239	174–316	1.06	2.82	512
N: Montclair – Walkley	H4B	208	175	132–224	0.84	0.54	98
N: Walkley – Cavendish	H4B	283	205	157–260	0.72	1.60	292
N: Cavendish – Madison	H4V	233	172	125–235	0.74	1.57	285
S: Cavendish – Madison	H4B	316	204	132–317	0.65	1.96	356
N: Madison – Grand	H4B	260	195	155–244	0.75	1.54	279
S: Madison – Grand	H4B	253	194	151–244	0.77	2.61	475
N: Grand – Hingston	H4B	270	201	152–257	0.74	1.17	213
S: Grand – Hingston	H4B	323	232	176–302	0.72	1.17	213
N: Hingston – Royal	H4A	192	167	113–242	0.87	1.20	219
S: Hingston – Royal	H4A	267	312	215–441	1.17	1.18	215
N: Royal – de Melrose	H4A	204	196	146–258	0.96	1.13	206
S: Royal – de Melrose	H4A	200	163	117–225	0.82	1.25	228
N: de Melrose – d'Oxford	H4A	259	176	134–221	0.68	1.76	320
S: de Melrose – Harvard	H4A	249	314	228–415	1.26	1.21	220
S: Harvard – Marcil	H4A	186	164	111–242	0.88	1.18	214
N: d'Oxford – Girouard	H4A	325	288	218–372	0.89	1.58	287
S: Marcil – Girouard	H4A	289	235	176–304	0.81	1.10	199